

DOTLED



DOTLED / DOT120

Ürün Kodu Product Code	Çalışma Voltajı (V) Operating Voltage (V)	Led Miktarı (Ad/mt) LED Quantity (Pcs/mt)	Işık Akısı (lm/mt) Luminous Flux (lm/mt)	Güç (W/mt) Power (W/mt)	Çap (cm) Diameter (cm)	Ağırlık (kg/mt) Weight (kg/mt)
DOT120-MN	24V DC	18	336	2.8	12	0.135
DOT120DMX-MN	24V DC	18	336	2.8	12	0.135
DOT120DMX-TNB	24V DC	36	336	2.8	12	0.135
DOT120DMX-RGB	24V DC	18	---	2.8	12	0.135
DOT120DMX-RGBW	24V DC	36	---	3.8	12	0.135

Aksesuarlar
Accessories

PCB Con.

IP20 Con.

IP67 Con.

Işık Açısı
Light Angle

120°

Renk
Color

3000K 4000K 6500K CCT RGB


Kullanım Alanları
Usage Areas

Kontrol Sistemleri
Control Systems

0-10V PWM DMX DALI

IP20 IP44 IP67

CE RoHS Ta -30/+50 IK08 Ra>85 LED 3-step MacAdam A++

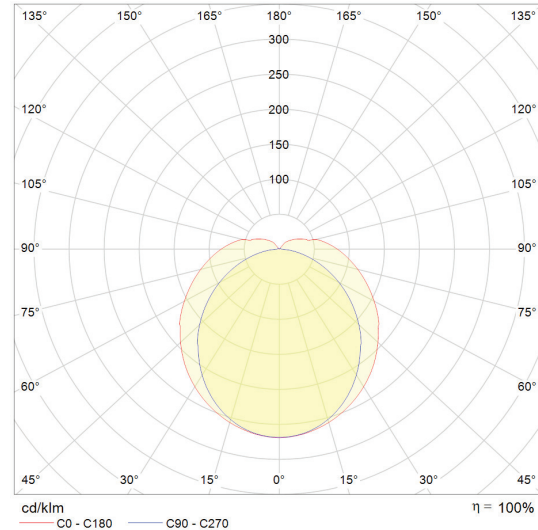

Ürün Açıklaması Product Description

Piksel efekt veren bir ürün olarak cephe tasarımlarında tercih edilmektedir. Uygulanmak istenilen iç mekanlarda da kullanılabilir. Polikarbon enjeksiyon yapısıyla dayanıklı ve montajı kolaydır.

It is preferred in facade designing for pixelated effect. Usable for indoor. It can be easily applied by its polycarbon injection form.

Teknik Özellikler Technical Specifications

LED: Yüksek verimli SMD LED'ler CREE, OSRAM, SAMSUNG, NICHIA
GÖVDE: Plastik enjeksiyon gövde.
DİFÜZÖR: UV korumalı, darbeye dayanıklı PMMA difüzör
IP KORUMA: CNC makina ile dökülmüş silikon. Kalınlık farkı oluşmaz ve ton farklılıkları olmaz.
PCB: Kalınlık 1.6mm, genişlik 16mm 70u bakır alüminyum veya FR4 PCB
SOĞUTMA KAPASİTESİ: Maksimum 5W

LED: High efficiency SMD LEDs CREE, OSRAM, SAMSUNG, NICHIA
BODY: Plastic injection body.
DIFFUSER: UV resistant, impact resistant PMMA diffuser
IP PROTECTION: Silicone cast by CNC machine. No thickness difference and no tone differences.
PCB: Thickness 1.6mm, width 16mm 70u copper aluminum or FR4 PCB
COOLING CAPACITY: Maximum 5W

Montaj Detayı Mounting Detail

Montaj Seçenekleri Mounting Options

- 1) Vida M3.9 / Screw M3.9 (Recommended)
- 2) Çift Taraflı Bant / Double-sided Tape
- 3) Silikon / Silicon

